THE R. C. MUSSON RUBBER CO.

1320 E. ARCHWOOD AVE. • P.O. BOX 7038 • AKRON, OH 44306-0038
E-mail: info@mussonrubber.com • www.mussonrubber.com

(330) 773-7651
1-800-321-2381
FAX (330) 773-3254

No. LL-10 Long-Life Entrance Mats

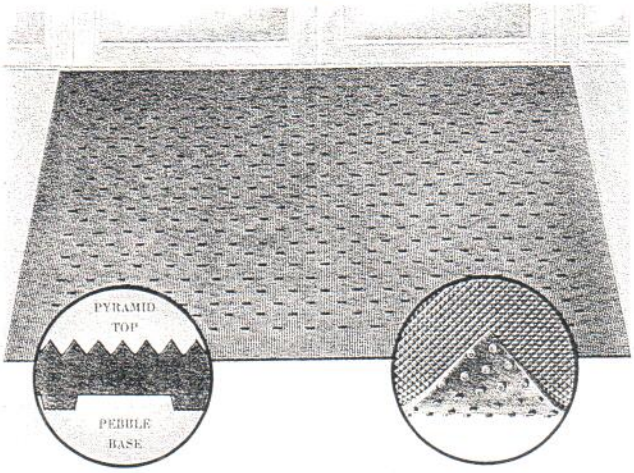

Available 3/8" or 1/2" thick, square edges for recess use or beveled edges for surface use. Use either thickness in Musson Aluminum Recess Mat Frame. All mats are custom made to exact size required. Available in custom sizes up to 4'x16'. You may trim solid outside borders on the job for exact fit.

SPECIFICATIONS—No. LL-10
Furnish and install Musson Pyramid Top, Pebble Base Perforated Rubber Entrance Mats of prime quality rubber compound, free of calendering and curing defects, resistant to weather, aging and ozone in normal concentrations. Mats shall have standard slot (or 1/4" round, or 5/16" cloverleaf) perforations.

Mats shall be 3/8" (or 1/2") thick; custom-made to fit area indicated on drawing. Mats shall have square edges for recess use (or beveled edges for surface use). Large areas made in sections for ease in handling. Select from plain colors of Black, Brown, Red, Gray or Sand. Mats in multiple sections can only be produced in black.

Select from standard solid colors

BLACK BROWN SAND RED GRAY

PERFORATIONS

standard slot perforation — 1/4 inch round perforation — cloverleaf perforation



The 3/16" X 3/4" slot perforation is furnished unless otherwise specified. The 1/4" round or the 5/16" cloverleaf perforation is available. Solid borders for panelled effect are placed across width and/or length if requested. Mats can be furnished solid, no perforations.

FRAME SPECIFICATIONS:
No. RF-14 : Furnish and install Musson Aluminum Recess Mat Frame of extruded aluminum 6063 T-5 in sizes as indicated below. Frame shall be prefabricated at the factory to insure fit of mat, and shall be furnished complete with corner pins of aluminum and anchor pins of strap steel. Only 90-degree Right Angles shall be factory mitered. Install using manufacturer's recommendations to receive the Musson Mat specified. Recess frame so as to receive flooring material opposite mat as specified herein. A cement base shall be screeded into the interior frame area , using the edge of the frame as a guide.

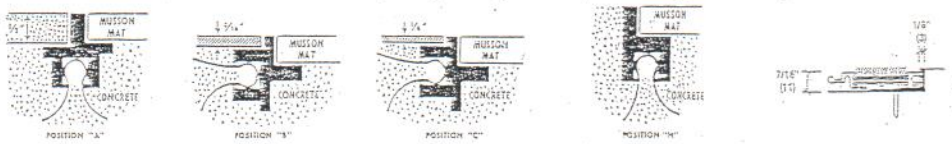

specify: Position "A" when finished floors are to be terrazzo, concrete or marble.

specify: Position "B" when finished floors are to be resilient floor covering in 1/8" gauge.

specify: Position "C" when finished floors are to be resilient floor covering in 1/4" gauge.

specify: Position "H" when frame is to be flush against walls, marble, terrazzo, thresholds.

Mill finish "L" shaped aluminum frame for existing recesses or surface use.

FRAME FINISH: Mill Finish Only
NOTE: Frames are optional and not included in pricing.

MAT/FRAME DIMENSIONS



Quantity	Mat Dimensions		Mat Color	Perforations	Edges	Thickness	Frame Dimensions		Frame Position
	A	B	(see above)	SSP/RDP/CLO/NONE	SQ./BEV.	3/8" or 1/2"	A	B	(A,B,C OR H)

Above dimensions submitted by:

Name Date