


## EM-650 - Vinyl Hinge - Bristle Filament Carpet insert

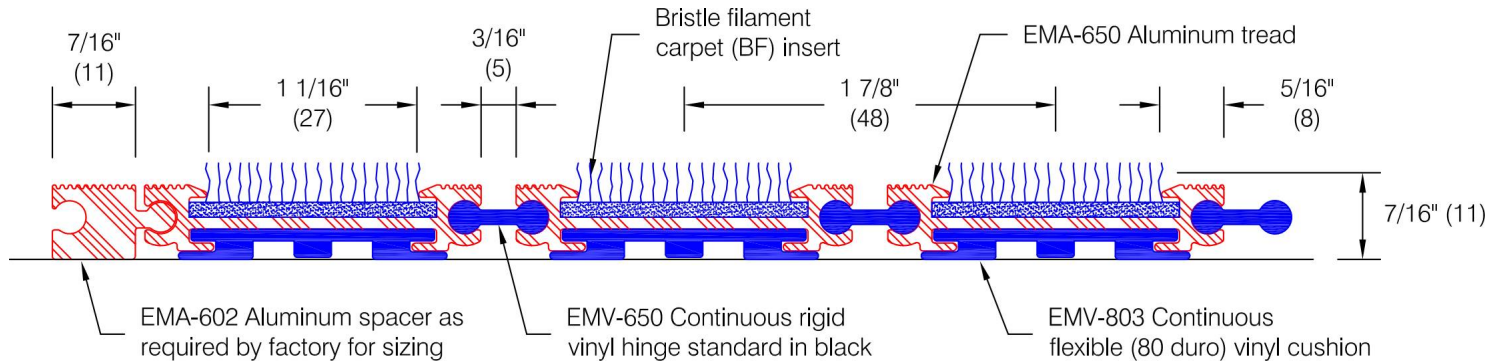


### Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047)  
Dry: 0.64, Wet: 0.67

### Optional Framing:


**\* Musson Rubber requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

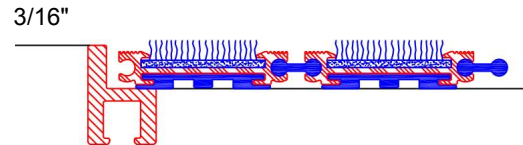

Recessed frame MRF-1002 (see ED. 1.0)  
or MRF-1005 (see ED.2.0)

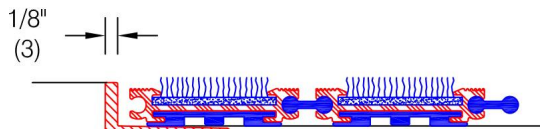


Recessed frame SSF-125 (see ED.3.0)

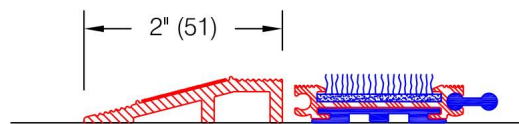


Surface frame BSF-225 (see ED.4.0)

### Hinge Details:



Ball & Socket Hinge

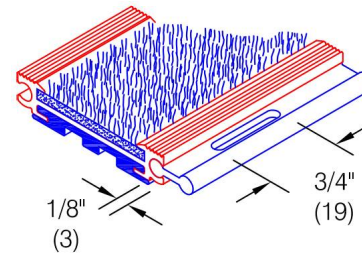

Perforated hinge

### Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)

### Finishes:

- Aluminum tread and spacers:  
Mill finish (standard) #405  
Medium bronze anodized #404  
Clear anodized #403  
Black anodized #462
- Vinyl cushion and hinge: Black
- Bristle filament carpet insert:  
Manufacturer's standard colors

### Sectioning information:

Width  
144" (3658) max  
single section

Height  
144" (3658) max  
recommended  
single section

**\* Mats over 66 square feet may require sectioning as determined by the factory**

Customer:

Project:

Architect:

Sales Rep :

ED.13.2c