THE R.C. MUSSON RUBBER CO.




(330) 773-7651 1-800-321-2381

FAX (330) 773-3254


1320 E. ARCHWOOD AVE. • P.O. BOX 7038 • AKRON, OH 44306-0038 E-mail: info@mussonrubber.com • www.mussonrubber.com

EM-800 - Aluminum Hinge - Bristle Filament Carpet Insert

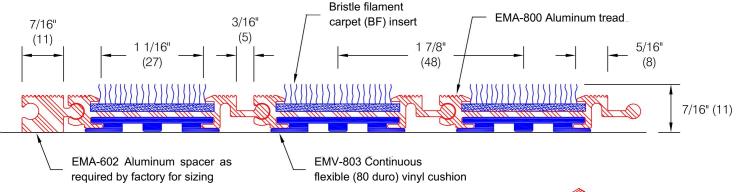


Optional Framing:

* Musson Rubber requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.



Recessed frame MRF-1002 (see ED.1.0) or MRF-1005 (see ED.2.0)




Surface frame BSF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge



Optional perforated hinge (solid hinge standard)

Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)

Project: Sales Rep :

Features:

- Extruded aluminum treads alloy 6063-T6
- Continuous flexible vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Solution dyed polypropylene fibers, 27 oz/sqyd with 50% Blend 600/12-Denier multi-filament and 595/D1 monofilament. Fibers are fusion bonded to continuous two-ply rigid backing.
- Fibers are waterproof with UV inhibitors for exterior use
- Static Coefficient of Friction (ASTM D2047)
 Dry: 0.64, Wet: 0.67

Finishes:

- Aluminum tread and spacers:
 Mill finish (standard) #405
 Medium bronze anodized #404
 Clear anodized #403
 Black anodized #462
- · Vinyl cushion: Black
- Bristle filament carpet insert: Manufacturer's standard colors

Sectioning information:

Width 144" (3658) max single section

Height 144" (3658) max recommended single section

ED.15.0e

Customer: Architect:

Mats over 66 square feet may require sectioning as determined by the factory