


EM-800 - Aluminum Hinge - Rigid Corrugated Vinyl insert

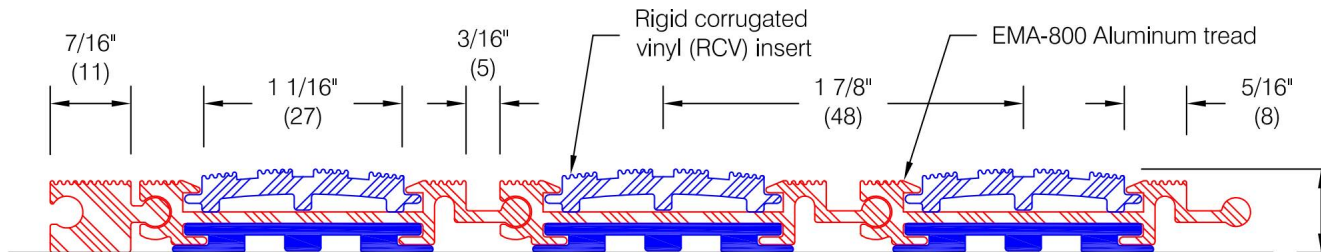


EMA-602 Aluminum spacer as required by factory for sizing


EMV-803 Continuous flexible (80 duro) vinyl cushion

Optional Framing:


*** Musson Rubber requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

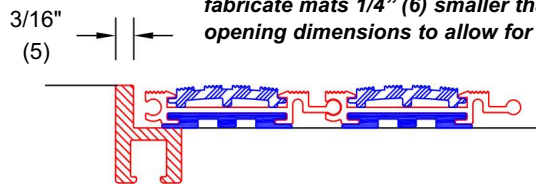

Recessed frame MRF-1002 (see ED.1.0)
or MRF-1005 (see ED.2.0)

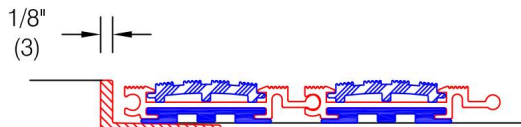

Recessed frame SSF-125 (see ED.3.0)




Surface frame BSF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge

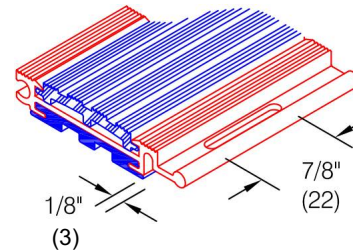

Optional perforated hinge
(solid hinge standard)

Optional Nosings:



Square vinyl nosing (see ED.20.0)



Beveled vinyl nosing (see ED.21.0)

Features:

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Rigid corrugated vinyl insert (colorable)

Finishes:

- Aluminum tread and spacer:
Mill finish (standard) #405
Medium bronze anodized #404
Clear anodized #403
Black anodized #462
- Vinyl cushion: Black
- Rigid corrugated vinyl insert:
Manufacturer's standard colors

Sectioning information:

Width
144" (3658) max
single section

Height
144" (3658) max
recommended
single section

*** Mats over 66 square feet may require sectioning as determined by the factory**

Customer:
Architect:

Project:
Sales Rep:

ED.19.8b